

SHIN-NIPPON
by **Rexxam**

L e n s m e t e r

LM-15

LENSMETER MODEL: LM - 1 5





**Lightweight, cordless models can be carried any place.
No cord to obstruct handling the lens meter
Also, now you can use our LM-15 with an AC adapter!**

Features

- New refined appearance with convenience-oriented design ensures operational ease.
- Troublesome lamp replacement is eliminated by an LED light source.
- The auto power-off function maximizes battery life even when the OFF-switch is forgotten. The batteries run for more than 200 hours continuously, and the power-off time is adjustable (2-6 min.).
- Can be clamped at any angle within from 45°~90° allowing measurement while in a comfortable position.
- Can be tilted to a full 90° for easy measurement of contact lenses.
- When an AC adapter is connected, the battery supply circuit is automatically closed to save battery life.

Specifications

Model		LM-15	LM-15A	LM-15B	LM-15C	LM-15D
Vertex refracting power	Measurement range	0~±25D				
	Graduation	Within ±3D : 0.125D step Over ±3D : 0.25D step				
Prism refracting power	Measurement range	0~5△D				
	Graduation	1△D step				
	With prism compensator	Max. 20 △D				
Axis angle	Measurement range	0~180°				
	Graduation (Internal)	∇°	1°	1°	—	1°
	Graduation (External)	5°	—	5°	2°	5°
Inspection lens diameter	Measurement range	24~90 mm φ (Contact lens possible)				
Tilting		45~90°				
Power supply		SUM3 battery×2 or AC adapter (option)				
Light source		LED				
Dimensions		355(H)×340(D)×170(W)				
Weight		3.6kg	3.4kg	3.6kg	3.2kg	3.6kg
Standard accessories		2 Alkaline battery (SUM3) 1 Dust cover 1 Standard lens holder 1 Contact lens holder 1 Bifocal lens holder				
Optional accessories		Prism compensator Diopter range : 15 diopters Graduations : 1 diopter step Angle scale : 0~180° Graduations : 5° AC adapter (see specifications)				

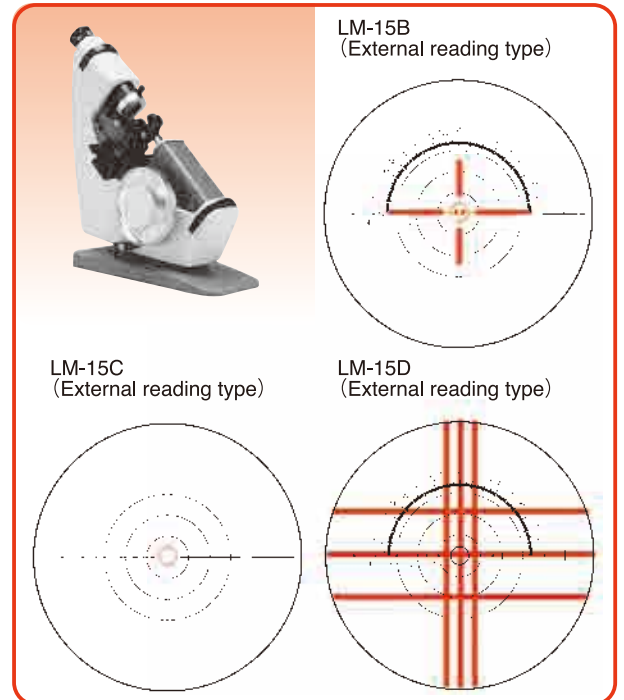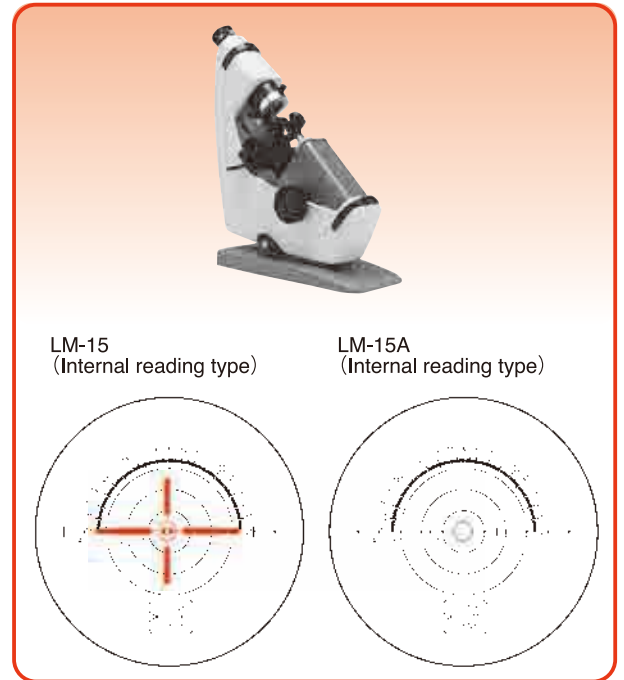

AC adapter (Specifications)

- Out put : DC 3V 500mA
- Out put plug size
- Outside diameter : 5.5mm
- Inside diameter : 2.5mm
- Length : 9.5mm
- Polarity : see below



Design and specifications are subject to change without notice.

Distributed by